

With all of the options, how do you pick the right industrial masking tape for your job?

Length, width, colour, thickness, adhesion, strength: when it comes to industrial masking tapes, the options are almost endless. We know it can be overwhelming to understand the differences between them - and the impact they will have on your job.


That's why we've
made masking
simple.





5

**Five tapes.
Five colours.
Five levels
of performance.**

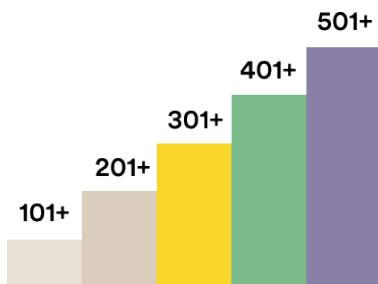


We have distilled a broad range of industrial masking needs into a single line of easy-to-choose tapes. Ranging from 101+ to 501+, each product level offers an increasing level of performance – from basic, everyday jobs to specialized, demanding applications.

From the Inventors of
Masking Tape



Since 1925.

We invented masking tape almost a century ago. In the time since, we have continued to evolve the technology in our products based on your needs. Today we're proud to help you explore new and better ideas.





**3M™
Value
Masking Tape**

101+

**For light duties
you don't take
lightly.**

Use our lightest colour for your lightest jobs. This tape is ideal for indoor, light-duty applications like marking, temporary holding, and wrapping.



**3M™
General Use
Masking Tape**

201+

**For everyday
jobs that need
some extra
gusto.**

This tape is a little darker and a little stronger. Use it for indoor, light-to-medium duty applications, like bundling, labeling and identifying.



**3M™
Performance
Yellow Masking
Tape**

301+

**For jobs between
tough and typical.**

This tape is designed for tasks that are somewhere in the middle. Use it for paint masking in temperatures up to 107°C (225°F) for 30 minutes, as well as industrial strength bundling, holding and colour coding.



**3M™
High
Performance
Green Masking
Tape**

401+

**For paint jobs
worth envying.**

Use this tape to create super sharp paint lines – even for two-tone colour applications. It sticks confidently, resists bleed-through, and removes cleanly, in temperatures up to 121°C (250°F) for 30 minutes.






































**3M™
Specialty High
Temperature
Masking Tape**

501+

**For paint jobs
that demand
royal treatment.**

Use this tape for high temperature paint baking, fascia painting, and pipe coating applications in temperatures up to 149°C (300°F) for 30 minutes. It is designed to stick confidently, resist bleed-through and remove cleanly for your most complex composites, under your most critical conditions.

Find your industrial masking tape.

					
	101+	201+	301+	401+	501+
 JOB DUTY	 Light	 Light - Medium	 Medium	 Heavy	 Heavy
 PAINT	 No	 No	 Yes	 Yes	 Yes
 TEMPERATURE	 Low 66°C (150°F)	 Low 93°C (200°F)	 Moderate 107°C (225°F)	 High 121°C (250°F)	 High 149°C (300°F)
 CONFORMABILITY	 Low	 Fair	 Good	 Excellent	 Best
 BEST SUITED FOR	 Marking, Wrapping, temporary holding	 Bundling, Labeling, identifying	 Paint masking, bundling, holding, colour coding	 High performance paint masking, including two tone paint	 High temperature paint baking, fascia painting and pipe coating applications



3M Industrial Adhesives
and Tapes Division
3M Canada, P.O. Box 5757
London, Ontario N6A 4T1
Phone 1-800-364-3577
Web www.3M.ca/IATD

Learn how we've made masking simple.
3m.ca/maskingmadesimple

3M and 3M Science. Applied to Life. are trademarks of 3M. Used under license in Canada.
© 2016, 3M. All rights reserved. 160304990 E BA-16-21195